



ROVA-IP65

Lay-in clean room luminaire for tee ceilings
with rear access

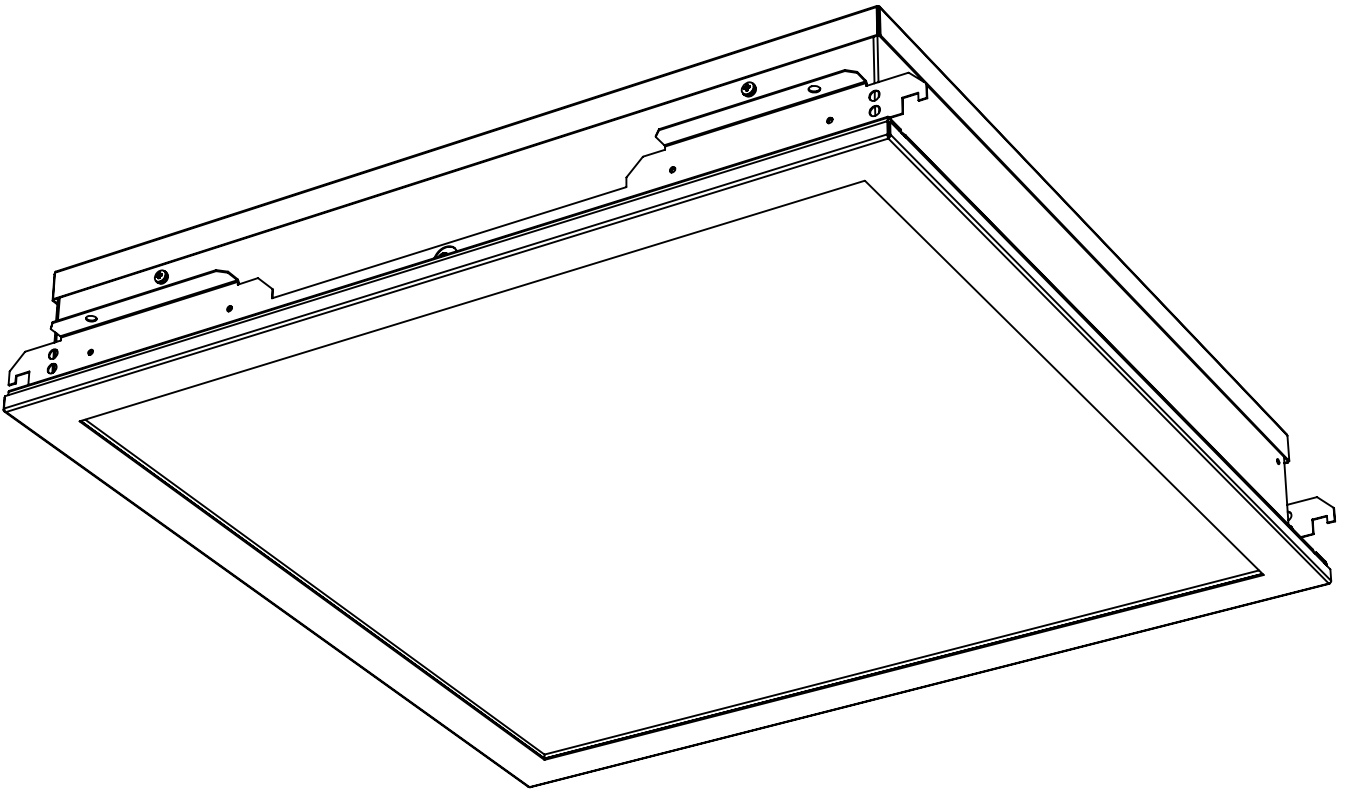


P&A

ROVA-IP65

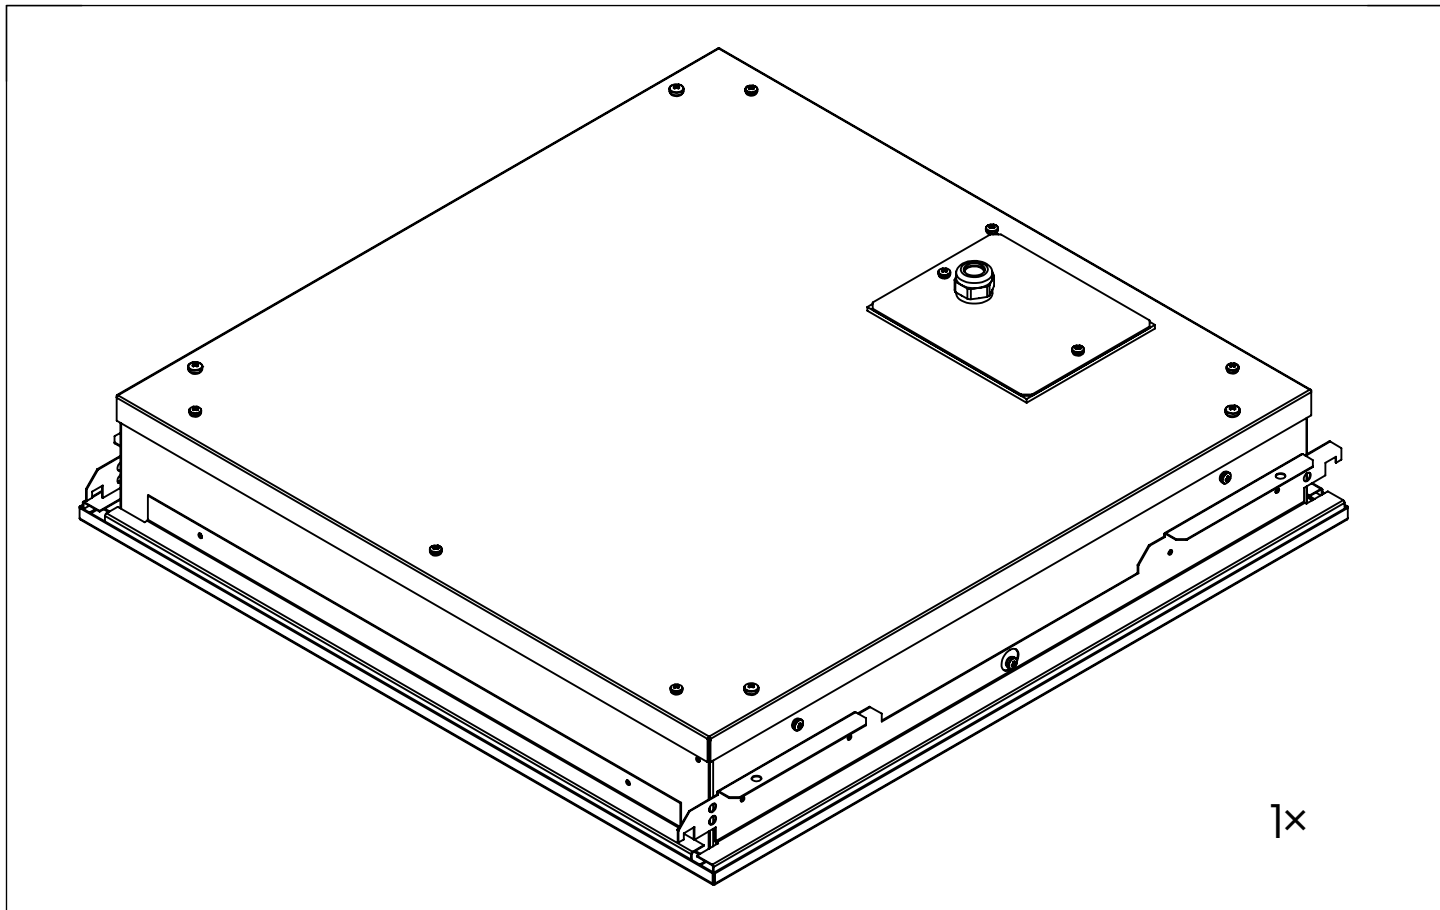

1x

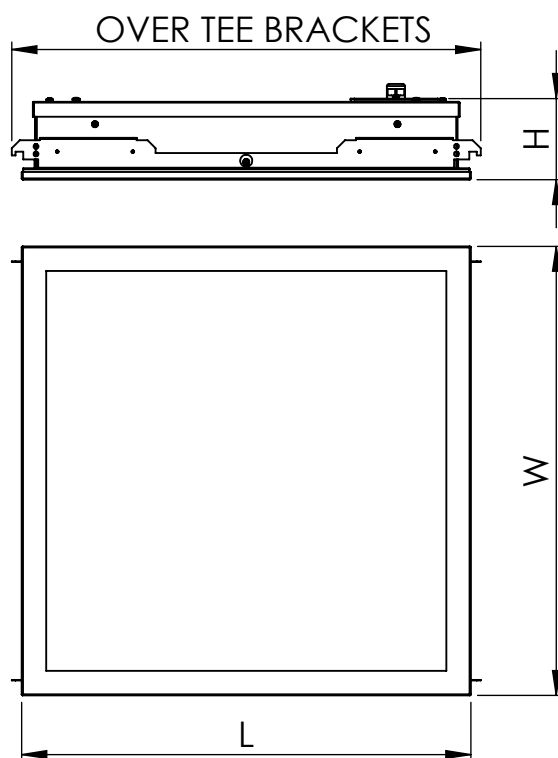


	L	W	H	OVER TEE BRACKETS	Mass
ROVA-IP65	594mm	594mm	108mm	620mm	14kg (T.B.C.)

ROVA-IP65


1

'Lift and tilt' installation.
Angle the luminaire to fit through the aperture.

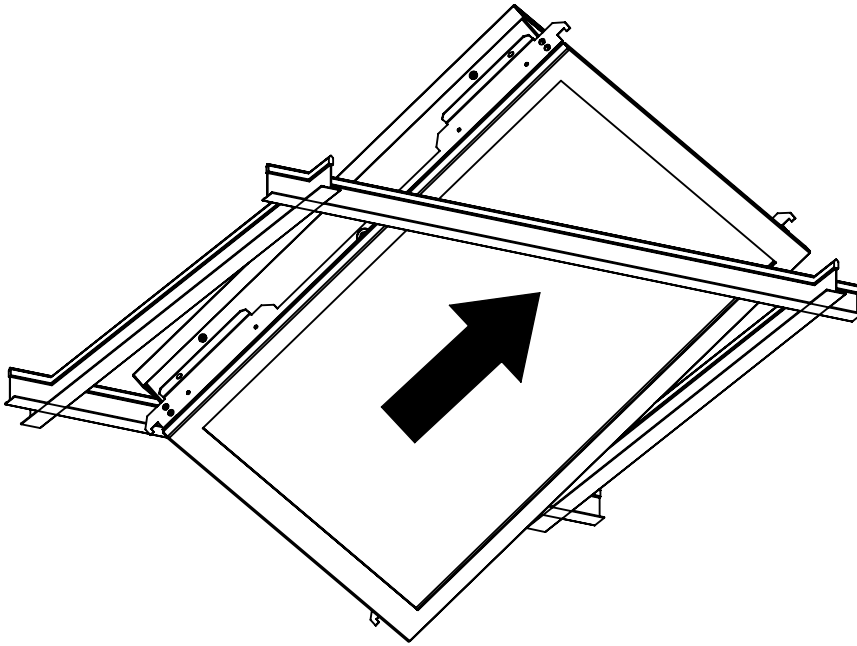

2



Then lower onto the tee bars.

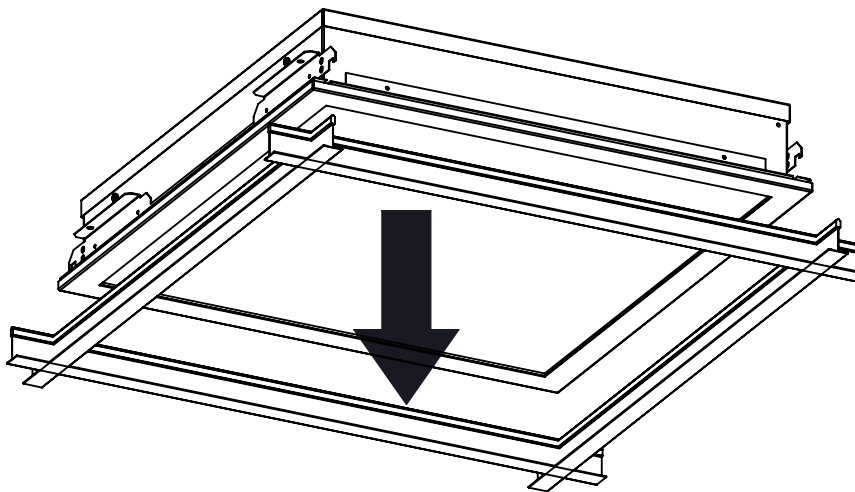


ROVA-IP65

3

Additional support measures.

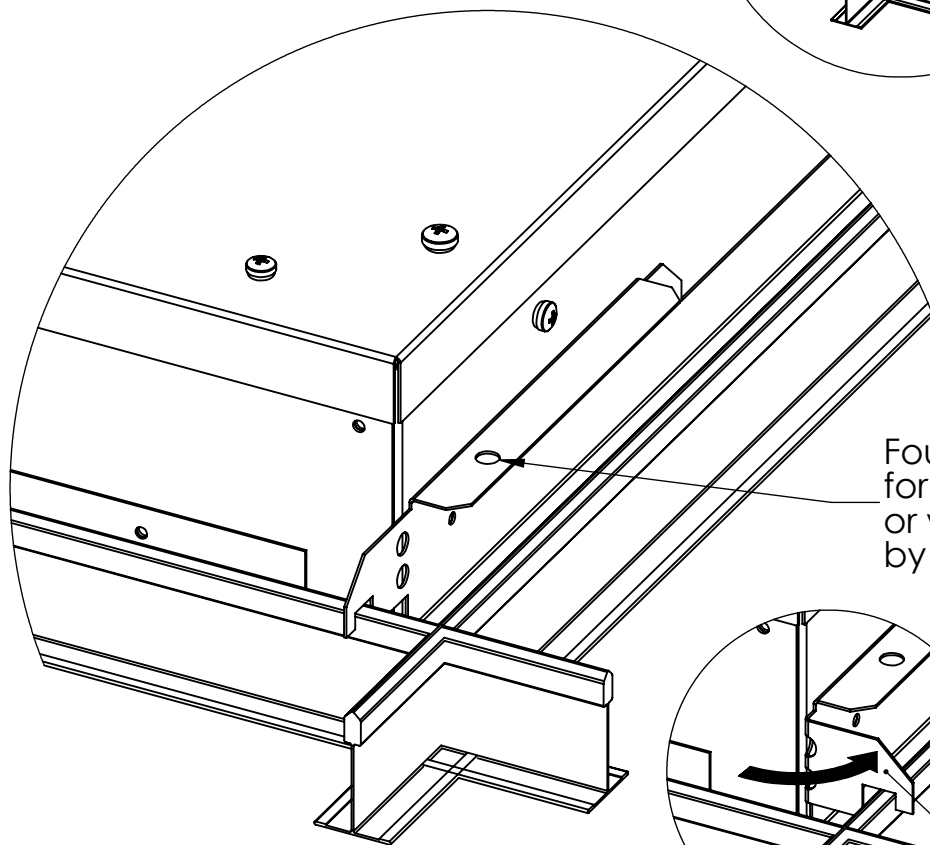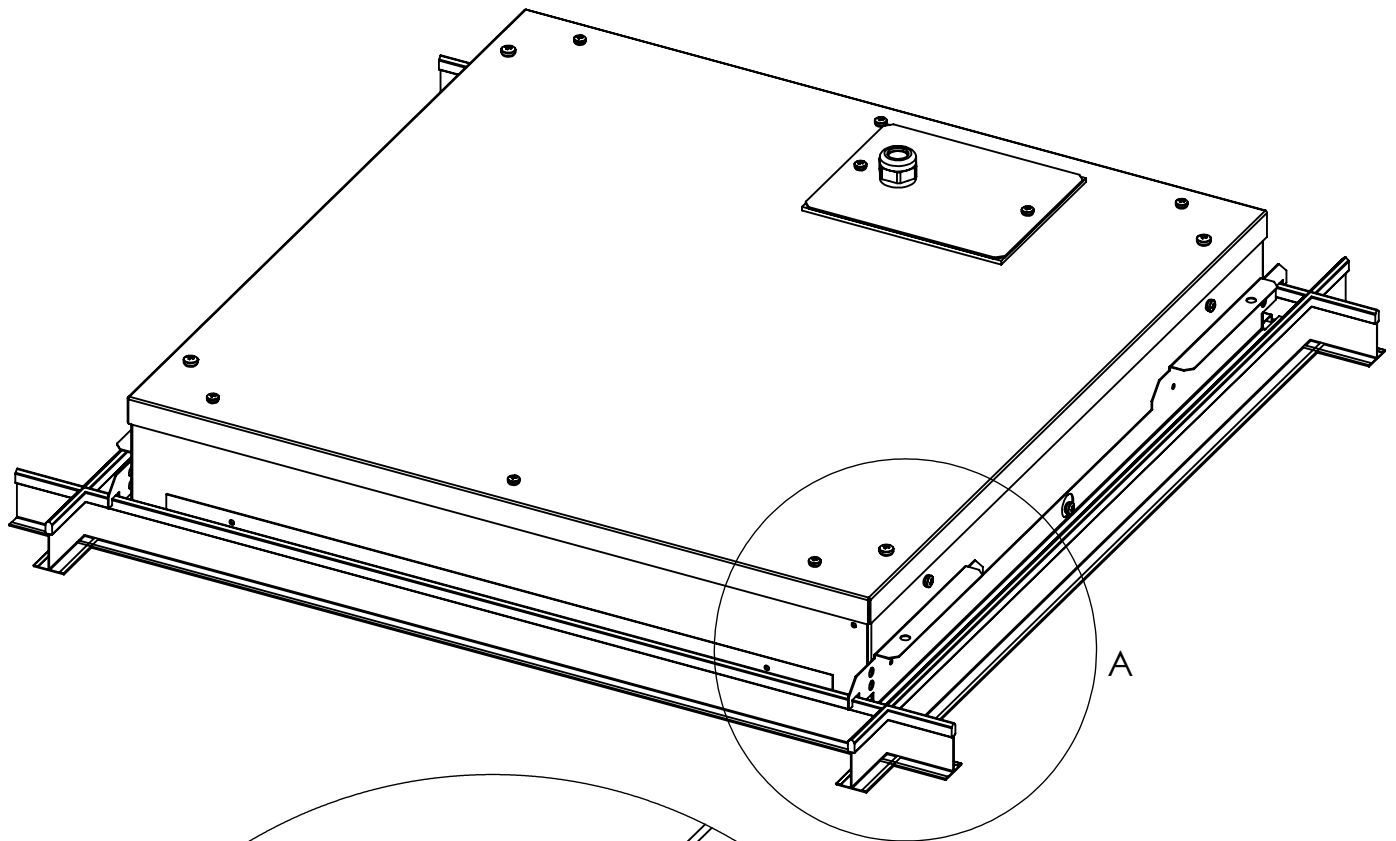


Four Ø6.5mm holes provided for additional support rods or wires (supplied and fitted by others).



ROVA-IP65

4

Electrical connection

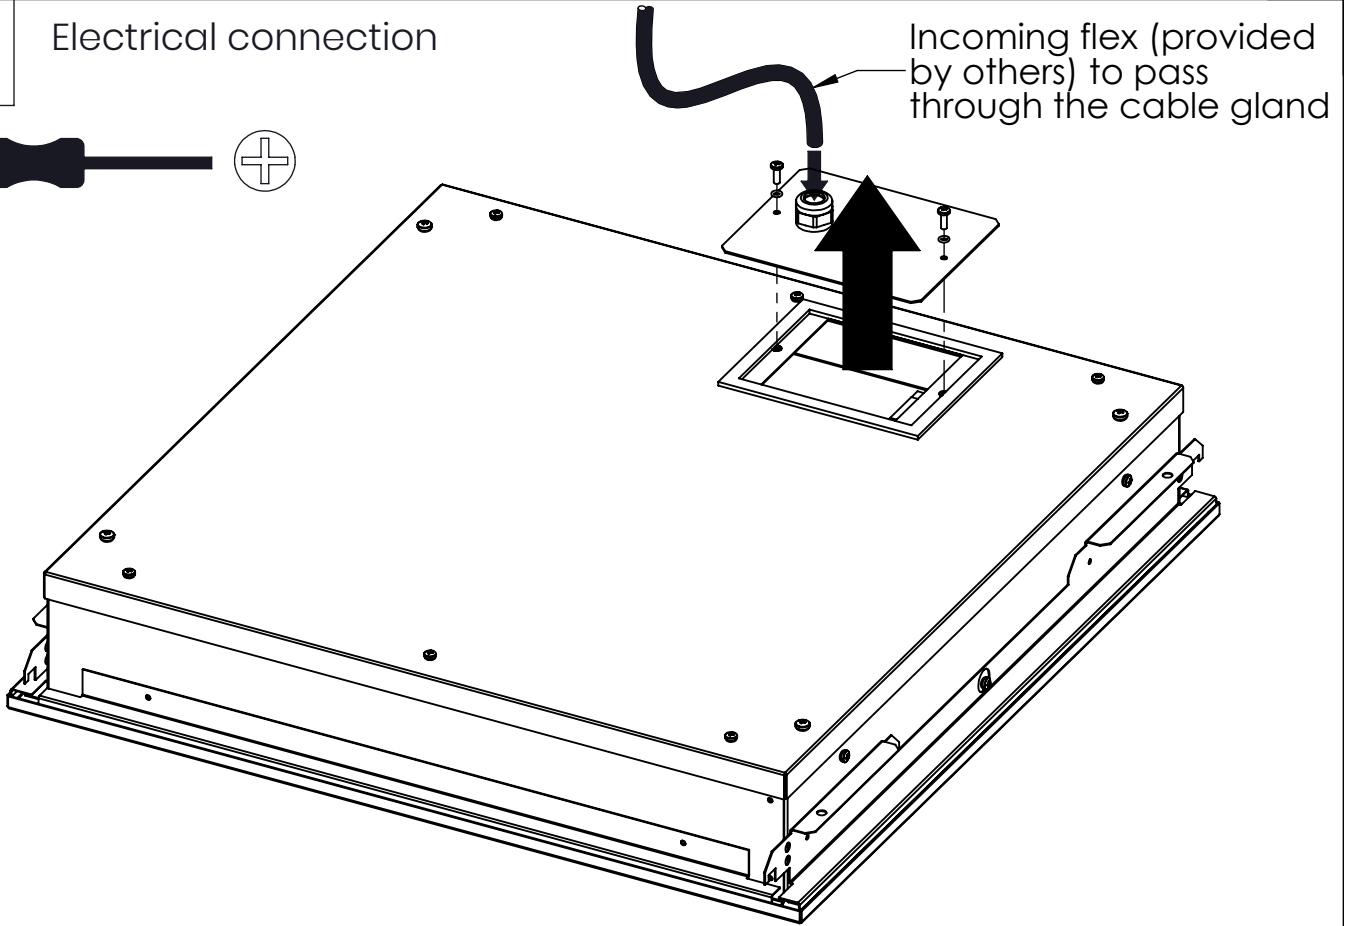

Incoming flex (provided by others) to pass through the cable gland



5a

Fixed output.

- Live
- Earth
- Neutral

Fixed output with integral emergency.

- Unswitched Live
- Switched Live
- Earth
- Neutral

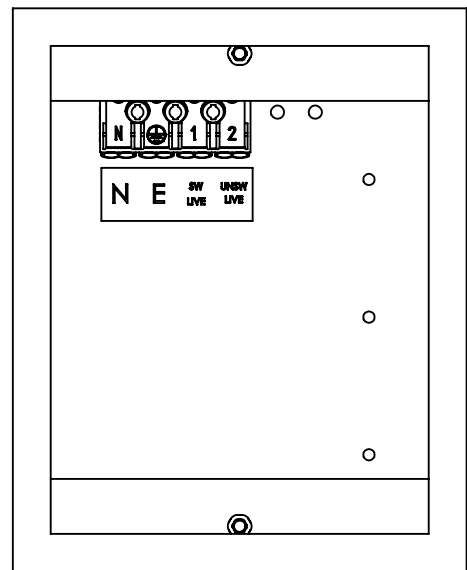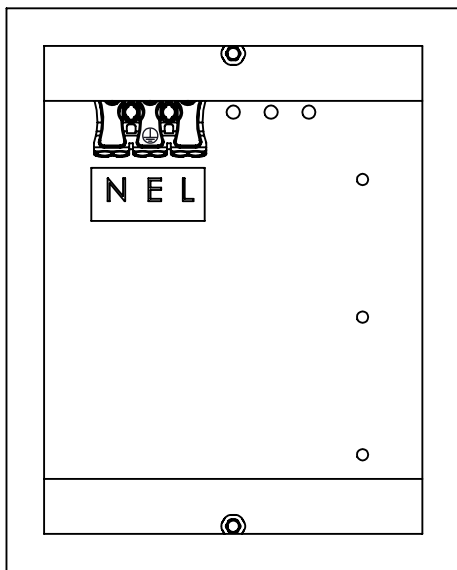


ROVA-IP65

5b


switchDIM.

- switchDIM Live
- Live
- Earth
- Neutral

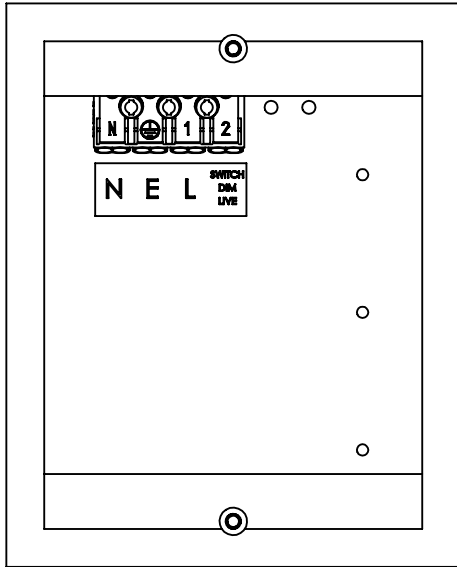


switchDIM with integral emergency.

- switchDIM Live
- Unswitched Live
- Earth
- Neutral
- Live

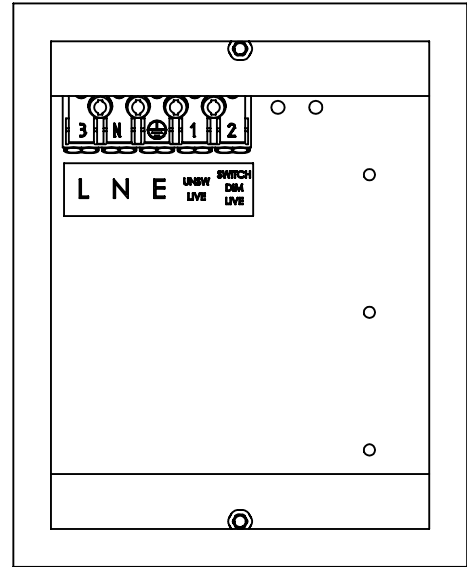


Example switchDIM circuit

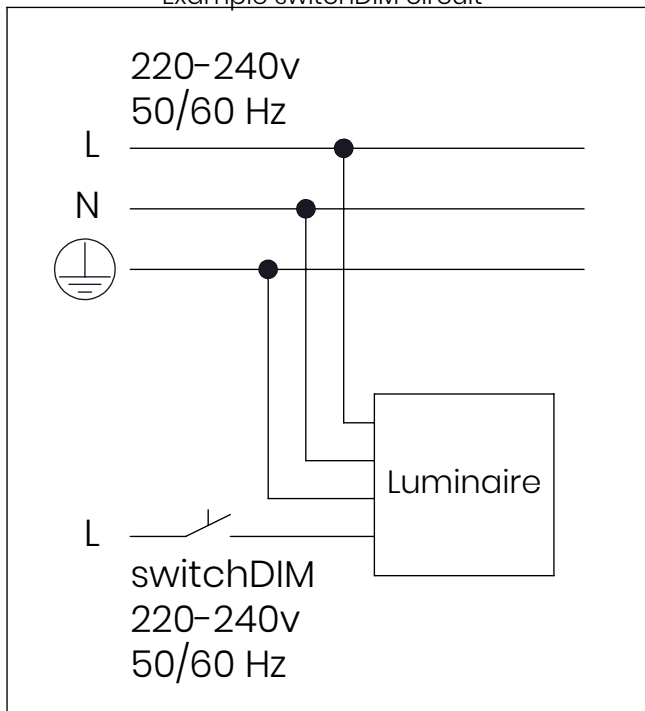

5c

DALI and DALI with integral emergency.


- Unswitched Live
- Earth
- Neutral
- DA
- DA

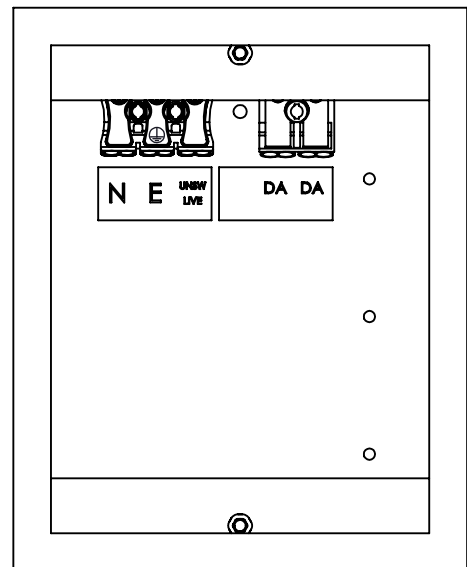

ROVA-IP65


6

Electrical connection

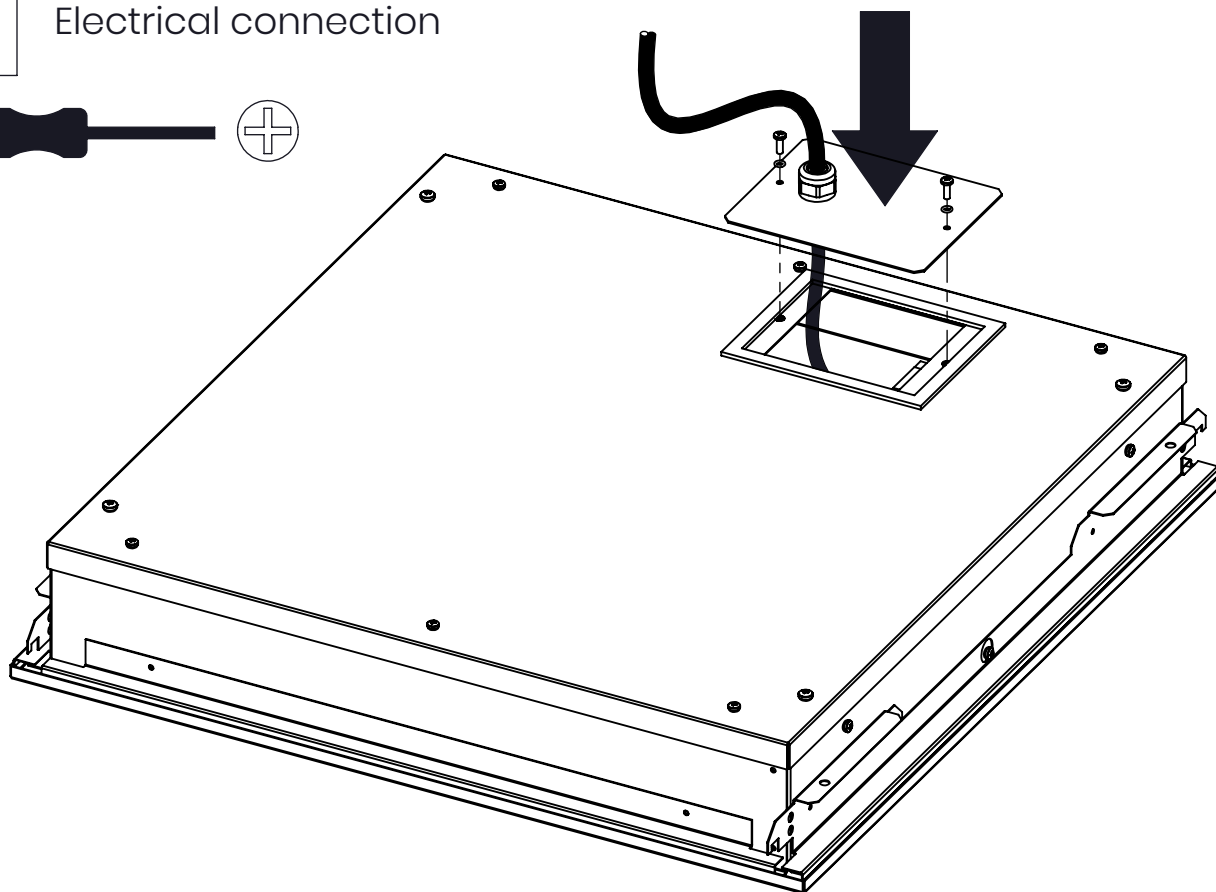

7

Tighten the cable gland

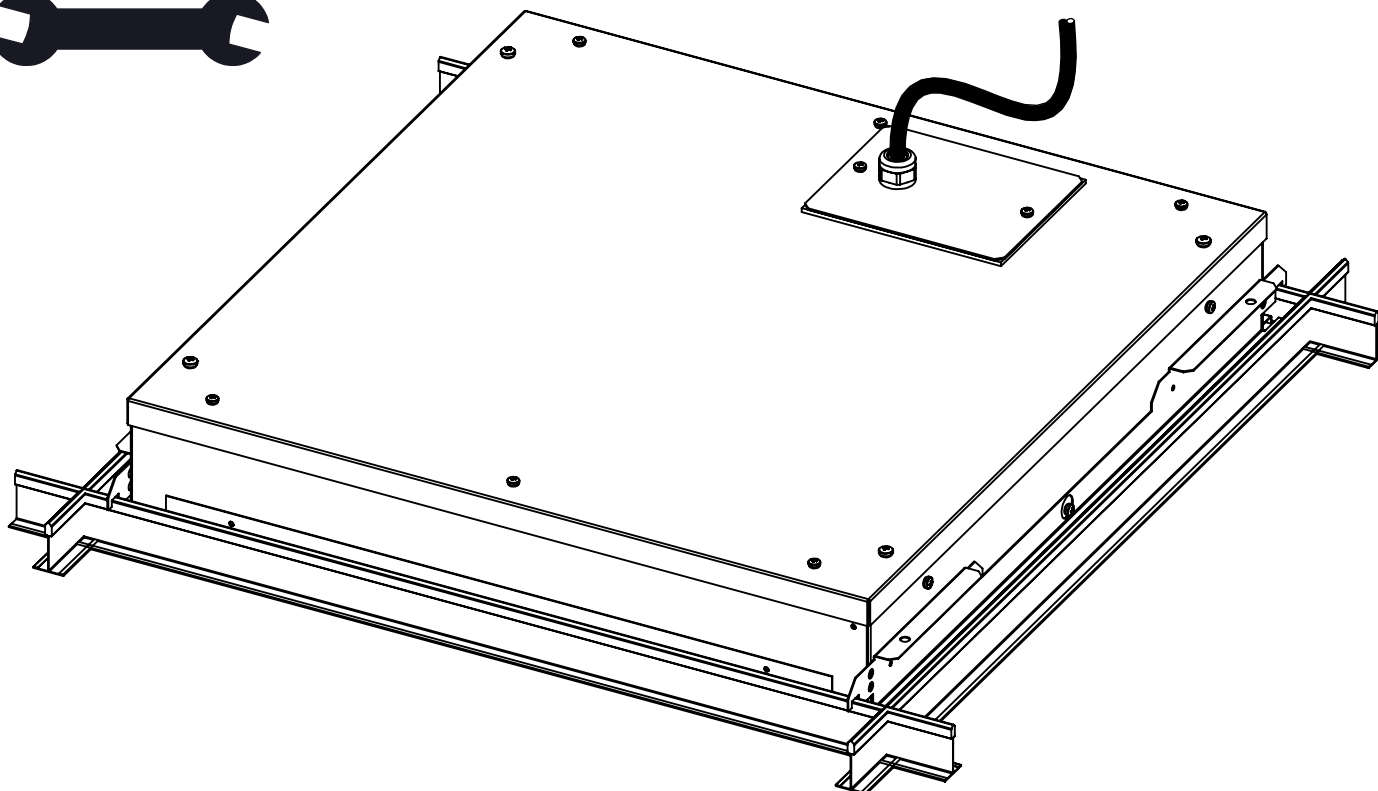

ROVA-IP65

Safety

- This luminaire should be installed by a qualified electrician in compliance with IEE regulations.
- Please ensure mains supply to luminaire is disconnected before installation or maintenance.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Ratings

- This Luminaire is designed to operate at 230VAC -6% +10% 216v to 252v.
DO NOT OPERATE OUTSIDE THIS RANGE.
- This luminaire is only suitable for installation within its rated Ingress Protection limits.

Subject to change without notice. Errors and omission excepted.
Always make sure to use the most recent release.



IP54	REAR HOUSING
IP65	FRONT PANEL



CROWN HOUSE, PLANTATION RD,
BURSCOUGH, LANCASHIRE. L40 8JT
01704 891 333
www.pandaprojects.co.uk