



DRM 500

PAP-DRM

Surface/suspended pendant drum. Recessing and semi-recessing accessory available.

Spun aluminium housing with retained opal PC diffuser. 80mm visible height.

- Various RAL colours on request, such as: RAL 9015M(WH), RAL9005M(BLK)
- Efficacy of upto 145 lm/W
- Various dimming options, including DALI, Switch Dim ect.
- Emergency options available
- Range of colour temperatures 3000K, 4000K & 6000K
- 5 Year Guarantee



DRM Suspended



DRM 900



Product Code Builder

| Type | Description | Code |
|--------------------|-----------------|-------|
| Product | PAP-DRM | DRM |
| Size & Output | 500 | 500 |
| | 500 Ho | 500HO |
| | 700 | 700 |
| | 700 HO | 700HO |
| | 900 | 900 |
| Colour Temperature | 900 HO | 900HO |
| | Warm White | 3K |
| | Neutral White | 4K |
| Optic | Cool White | 6K |
| | Opal | OP |
| Dimming Options | Fixed Output | FO |
| | Dali | A1 |
| | DSI | A2 |
| | Switch Dim | A3 |
| | 1-10v | A4 |
| Emergency | Casambi | A5 |
| | Standard 3 hour | EM3 |
| | DALI/EMPRO | EMD |
| | Self Test | EMS |

Example Code: PAP-DRM 500 3K OP FO EM3



PAP-DRM

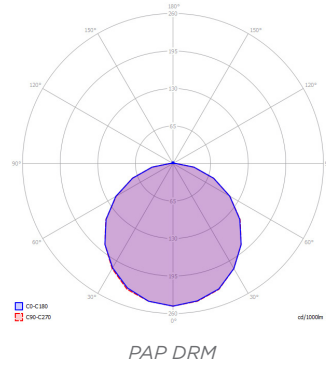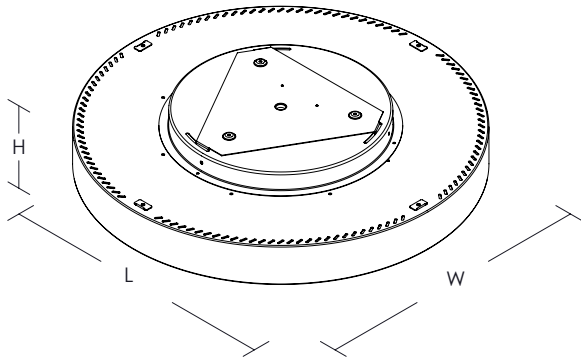

| Product | L x W x H (mm) | Ctt Watts | Luminaire / Lumens | LL / CW | Colour Temp | Ra | Colour Consistency | L90 / B10 |
|----------------|----------------|-----------|--------------------|---------|-------------|-----|--------------------|-----------|
| PAP-DRM 500 | 500 x 500 x 80 | 35 | 3660 | 105 | 4000K | >80 | SDCM 2 | >54K |
| PAP-DRM 500 HO | 500 x 500 x 80 | 43 | 4500 | 105 | 4000K | >80 | SDCM 2 | >54K |
| PAP-DRM 700 | 700 x 700 x 80 | 43 | 4500 | 105 | 4000K | >80 | SDCM 2 | >54K |
| PAP-DRM 700 HO | 700 x 700 x 80 | 55.7 | 5700 | 102 | 4000K | >80 | SDCM 2 | >54K |
| PAP-DRM 900 | 900 x 900 x 80 | 56 | 8100 | 145 | 4000K | >80 | SDCM 2 | >50K |
| PAP-DRM 900 HO | 900 x 900 x 80 | 93 | 12600 | 135 | 4000K | >80 | SDCM 2 | >50K |

