



Reach Q

Reach-Q is a highly efficient flat panel luminaire with 2 diffuser options

Suitable for fitting into MF ceilings & tiles as standard, can be manufactured to suit MF, tegular, concealed grid, spring tee and other ceiling types on request.

- RAL9016M as standard, other colours available on request
- UGR<19 option available when fitted with prismatic glare control diffuser
- Various dimming options, including DALI, Switch Dim etc.
- Emergency options available
- Range of colour temperatures 3000K, 4000K & 6000K
- 5 Year Guarantee


Product Code Builder

Type	Description	Code
Product	Reach Q	Q
Delivered Output lms	2634	3500
	3952	5300
	3000 Kelvin	3K
Colour Temperature	4000 Kelvin	4K
	6000 Kelvin	6K
	Optic	OPAL
Optic	UGR19	MP
	Sky Vinyl	SV
	Dimming Options	Fixed Output
Dali		A1
DSI		A2
Switch Dim		A3
1-10v		A4
Emergency	Casambi	A5
	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS

Example Code: REACH-Q 3500 3K OP A1 EM3





Custom Sky Vinyl Overlay

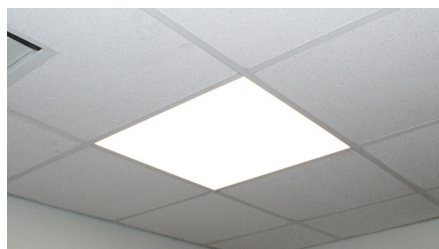

Standard OPAL Reach Q



Reach Q

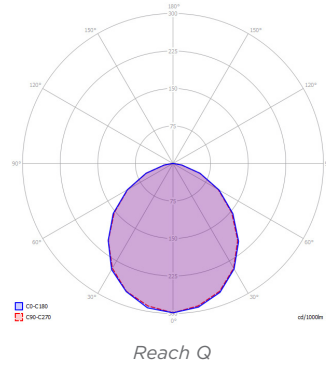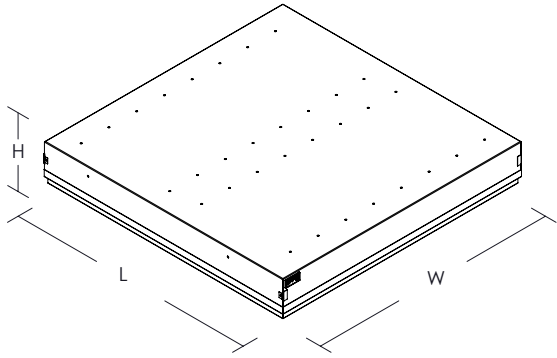

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
Reach-Q 3500	595 x 595 x 70	27	2634	98	4000K	>80	SDCM 2	>75K
Reach-Q 5300	595 x 595 x 70	41	3952	96	4000K	>80	SDCM 2	>75K