



PAP-PAK

Linear Luminaire with domed diffuser suitable for a variety of different lighting applications.

- T5 & T8 Batten replacement in three lengths of 1200mm, 1500mm and 1800mm.
- RAL9016 as standard, others available on request
- Various dimming options, including DALI, Switch Dim etc.
- Emergency options available
- Range of colour temperatures 3000K, 4000K & 6000K
- 5 Year Guarantee



Product Code Builder

Type	Description	Code
Product	PAP-PAK	PAK
Length	1200	1200
	1500	1500
	1800	1800
Colour Temperature	Warm White	3K
	Neutral White	4K
	Cool White	6K
Dimming Options	Fixed Output	FO
	Dali	A1
	Switch Dim	A3
	1-10v	A4
	Casambi	A5
Emergency	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS

Example Code: PAK 1500 3K A1 EM3



PAP-PAK

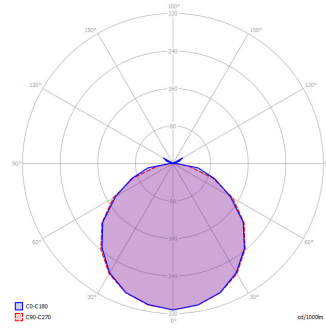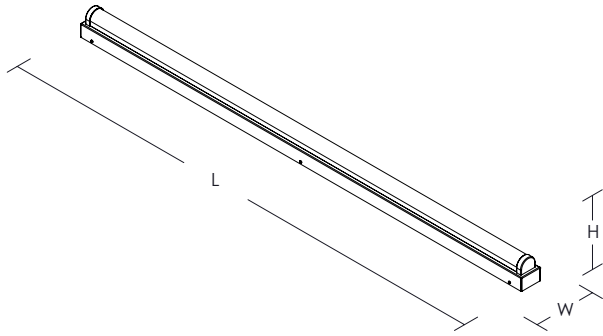

PAP-PAK-1800 6625

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
PAP-PAK 1200	1200 x 50 x 60	23.5	3314	141	4000K	>80	SDCM 2	>75K
PAP-PAK 1500	1500 x 50 x 60	34.5	4850	141	4000K	>80	SDCM 2	>75K
PAP-PAK 1800	1800 x 50 x 60	47.2	6625	140	4000K	>80	SDCM 2	>75K
PAP-PAK 1800 HI	1800 x 50 x 60	72.7	9800	135	4000K	>80	SDCM 2	>75K